


REV	DESCRIPTION	DATE

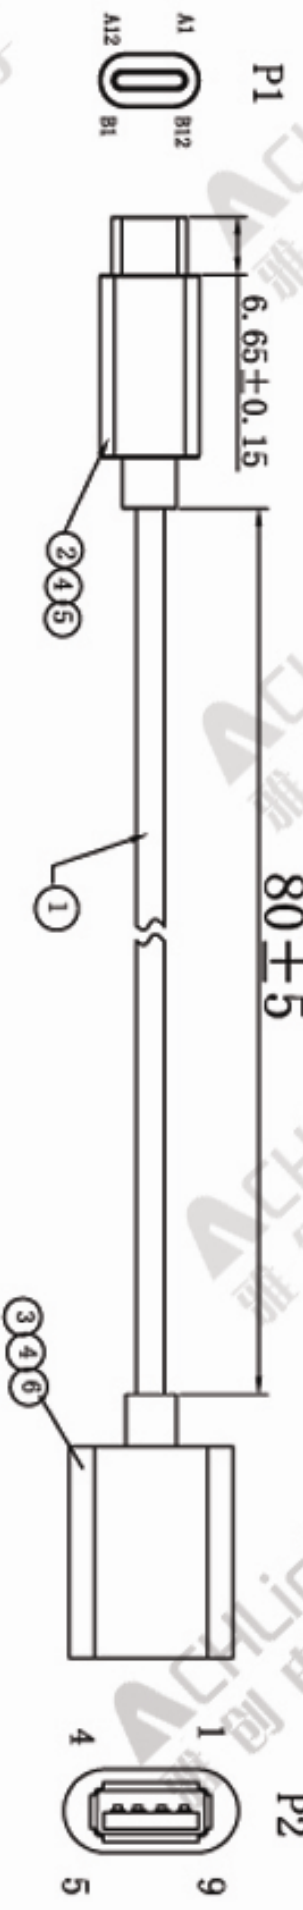

PIN OUT

P1	P2
A4, B4, A9, B9	1
A7	2
A8	3
A1, B1, A12, B12	4
B11	5
B10	6
A1, B1, A12, B12	7
A2	8
A3	9
外壳	外壳

1. TESTING CONDITIONS:
A. 100% QC OPEN SHORT & MISS WIRING TEST
B. INSULATION RESISTANCE: DC300V 5Mohm MIN
C. CONDUCTOR RESISTANCE 3ohm Max

Mould No. : P1: B266/ B223 P2: B267

⑧	IPC	Carton 460*300*250mm	F06-403025-001
⑦	IPC	PE Transparent Heat Sealing Plastic Bags : 270*350*0.05mm	F05-273505-002
⑥	IPC	USB 3.1 AF Full package red	F01-080000-004
⑤	A/R	USB 3.1 CM shell red	P2-1500-001
④	A/R	PVC 45P-R0 White	P1-0445-001
③	IPC	USB 3.0 AF Blue Cord Welding Type	C211-0204-010
②	IPC	USB 3.1 CM with PCB board resistance S.1 K	C241-0405-001
①	IPC	USB3.1 Standard Line 24#32#32TX+6#B 00:3.8mm White L=123mm	X275-041238-641
NO	Design	Description	Part No

APPROVED:

CHECKED:

DRAWN:

UNLESS OTHERWISE SPECIFIED TOLERANCE

X. X ±0.20

X. XX ±0.15

ACH VACUUM TECHNOLOGY HOLDINGS LIMITED

TEL: 0755-88210170 FAX: 0755-88210123

DRAWN NAME: USB3.1 Type-C TO USB 3.0AF L=80mm

PRODUCT NO:

CUSTOMER P/N:

1 2 3 4 5 6 7